
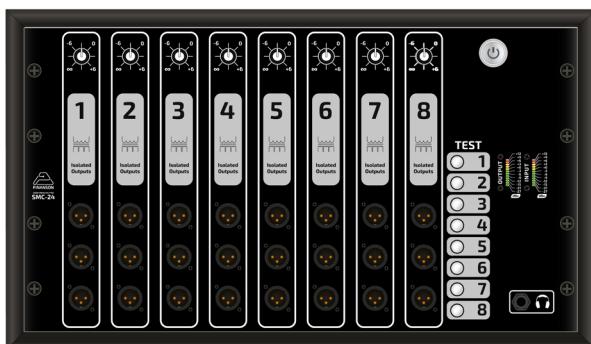


Tech Data

PRESS SPLITTER

SMC 24

SEVERAL FORMATS

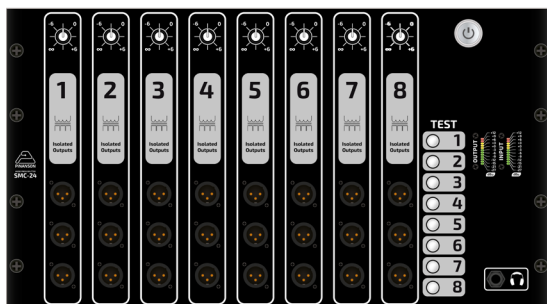

Description

The **SMC 24 Press Splitter** of Pinanson offers to the user:

- **1 XLR-F** balanced by transformer **input**.
- **1 XLR-M** balanced **output** for Link.
- **24 XLR-M** balanced and insulated (by transformer) **outputs**.
- Gain potentiometer - ∞ to +6 dB.
- Headphones and visual monitoring.
- Intuitive and straightforward use.
- Reliable response.
- Several formats: *Flight Case* (Briefcase style), *AR Box* (Rack mount) and *Wall Rack* (Recessed mounted).

Tech Data

PRESS SPLITTER

SMC 24

SEVERAL FORMATS

Description

- The **SMC 24 Splitter for press of Pinanson** offers distribution of 1 line level signal into 24 outputs.
- **Both** the input and output signals **work at line level**.
- The user will have the outputs with the possibility to **modify the level with a potentiometer** per each group of two and **check the input level** thanks to visual monitoring by LEDs.
- They are **several formats**: portable flight case format, AR box for 19" rack format and WR to be place in surface format.
- The active SMC 24 splitter has a highly good frequency response (deviation in 20Hz-20KHz of ± 0.1 dB), low distortion (THD + N $\leq 0.01\%$).

Applications

For **Press Room** when splitting 1 LINE Audio input signal into 24 insulated identical outputs (with level control and monitoring) and 1 link output, is needed.

Tech Data

PRESS SPLITTER

SMC 24

SEVERAL FORMATS

Tech Specifications

Max. Input Level	50 Hz, 0.4% THD+N	+ 2 dBu
	1KHz, 1% THD+N	+20 dBu
Input Impedance <i>(Balanced, +4 dBu, 1 KHz)</i>	44 kΩ	
Output Impedance <i>(Balanced, +4 dBu, 1 KHz)</i>	600 Ω	
Gain <i>(Balanced Input/Output)</i>	- ∞ a +6dB 0.5 dB steps	
THD + N <i>(+4 dBu, 1KHz)</i>	≤ 0.03%	
IMD <i>(+4 dBu, 60 Hz y 7KHz)</i>	≤ 0.05%	
Frequency Response <i>(+4 dBu, 20 Hz – 20 KHz)</i>	± 0.05 dB	
SNR <i>(+ 4 dBu, 1KHz, BW 20 KHz)</i>	96 dB	
CMRR <i>(+ 4 dBu, 1KHz)</i>	>90 dB	
Power	Input Voltage	200-240 V _{AC} (*)
	Input Frequency	50-60 Hz
	Current (230 V)	100 mA


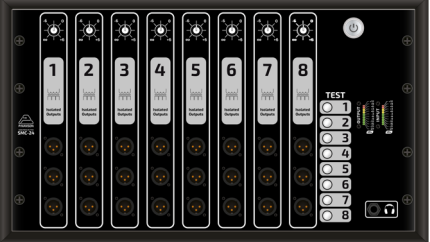
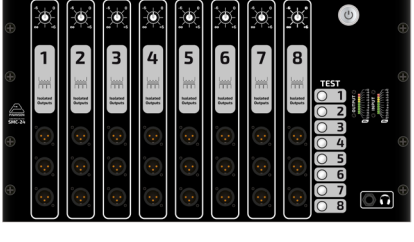
(*) For use below that voltage consult technical support

Tech Data

PRESS SPLITTER SMC 24 SEVERAL FORMATS

Physical Characteristics

Working Temperature	0-45°C
Finish	Electrostatic powder painting and direct print
Formats	

Flight Case Portable briefcase with lid	Wall Rack Wall hanging box	Caja AR Box for installation in 19" rack
<ul style="list-style-type: none"> Lid, metal clasps and hard plastic handle Reinforced corners Base with non-slip rubber feet <p>Dimensions: 540 x 220 x 230 mm Weight: 9.5 Kg</p> 	<ul style="list-style-type: none"> Extruded aluminium panels Wall rack box made of 1.5 mm steel sheet <p>Dimensions: 515 x 235 x 100 mm Weight: 9.10 Kg</p> 	<ul style="list-style-type: none"> Extruded aluminium panels <p>Dimensions: 483 x 178 x 210 mm Weight: 5.10 Kg</p> 

Tech Data

PRESS SPLITTER

SMC 24

SEVERAL FORMATS

Environment



Once this device has reached the end of its useful life, it must be deposited in an electrical waste collection point.



Web: www.pinanson.eu
@: pinanson@pinanson.eu

PINANSON S.L
Avda. Constitución, 40. Mondéjar (Guadalajara). ESPAÑA
Teléfono: +34 949 385 444 · Fax: +34 949 385 643

Review: March 2025

For possible changes due to continuous product improvements; Pinanson S.L. reserves the right to change the showed data in this document without notice. The data presented here correspond to the time it was compiled.

