


Tech Data

INSULATORS AND ADAPTORS

IMPEDANCE MATCHING BOXES

Multi-Adaptor

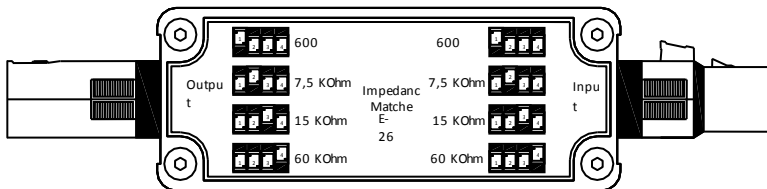

Description

- Impedance bi-directional adaptor box of 600 Ω, 7.5 KΩ, 15 KΩ ó 60 KΩ
- Switches to choose each input and output impedance depending on interest.
- Customizable product:
 - Election of connector.
 - Box format: MF Box (mobile box), AR Box (rack mount box), S Box (bolt box).
 - Number of channels (2,4...)

Applications

Situations where is necessary an impedance adaptation.

Electrical Characteristics

Maximum Input. Level	50 Hz, 0.4% THD+N	+6 dBu
	1KHz, 1% THD+N	+ 24 dBu
Source Impedance	600 Ω, 7.5 KΩ, 15 KΩ ó 60 KΩ	
Load Impedance	600 Ω, 7.5 KΩ, 15 KΩ ó 60 KΩ	
Gain (Balanced Inputs/Outputs)	- 20 dB a +20 dB	
THD + N (+4 dBu, 1KHz)	≤ 0.01%	
Frequency Response (20 Hz - 20 KHz)	± 0.06 dB	
SNR (+ 4 dBu, 1KHz, BW 20 KHz)	123 dB	
CMRR (+ 4 dBu, 1KHz)	65 dB	

Tech Data

INSULATORS AND ADAPTORS

IMPEDANCE MATCHING BOXES

Multi-Adaptor

Physical Characteristics

Connectors

1 Connector XLR-3-H(1) Ref.: Neutrik NC3FDL1

1 Connector XLR-3-M(1) Ref.: Neutrik NC3MDL1

⁽¹⁾ Customizable product, choose connector depending on necessity.

Matcher of 4 Positions in order to the input and output configuration according to serigraphy

Box Frame

Extruded Aluminium

6063 Alloy

T5 Treatment


Painted Finish:

- Electrostatic Coating Powder 100 – 150 μ .
- Colour: HB Black Gloss Texture.

Profile View


MF Format

(Mobile Box)




AR Format

(Rack mount Box)



S Format

(Bolt Box)



Tech Data

INSULATORS AND ADAPTORS

IMPEDANCE MATCHING BOXES

Multi-Adaptor

Covers

Calibrated steel sheet of 1.5 mm

Serigraphy

PVC 300 μ

Measurements

All test are performed with calibrated tools according to **ISO 9001 (ISO 9001:2015)**.
Audio measurements are done with **AudioPrecision APx515**.



Web: www.pinanson.com
@: pinanson@pinanson.com

PINANSON S.L
Avda. Constitucion, 40. Mondejar (Guadalajara). SPAIN.
Telephone: +34 949 385 444 · Fax: +34 949 385 643

Review: January 2018

For possible changes due to continuous product improvements; Pínanson S.L. reserves the right to change the showed data in this document without notice. The data presented here correspond to the time it was compiled.

