



Tech Data

PATCH PANEL

XLR



Description

- 1 Row of 16 XLR Audio connectors of 3 pin in 1 RU.
- Riveting Connectors.
- Standard panel (According to Reference page 3) and custom made up to 16 connectors.

Applications

Audio Panel with XLR-3 connectors.

Physical Characteristics

XLR Connector

XLR Female (Riveting Connector):

Neutrik NC3FDL1

XLR Male (Riveting Connector):

Neutrik NC3MDL1

Panel

Panel frame:


- Extruded Aluminium.
- 6063 Alloy.
- Treatment T5.
- Painted Finished:
 - Powder Electrostatic Covering 100-150 μ
 - Colour: Textured Matte Black

Tech Data

PATCH PANEL

XLR

Profile View:

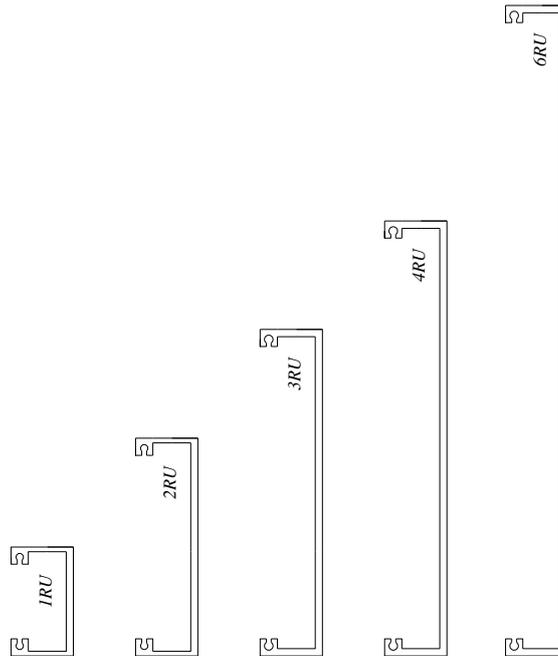

Label Profile:

- Extruded Aluminium.
- Painted Finished:
 - Powder Electrostatic Covering 100-150 μ
 - Colour: Textured Matte Black

Label:

- Polypropylene 100 μ .
- Colour: White.

Tie Cable Bar:

- F1 calibration and Steel 8 mm bar.
- Painted Finished:
 - Powder Electrostatic Covering 100-150 μ
 - Colour: Textured Matte Black

Tech Data

PATCH PANEL

XLR



Web: www.pinanson.com
@: pinanson@pinanson.com

PINANSON S.L
Avda. Constitucion, 40. Mondejar (Guadalajara). SPAIN.
Telephone: +34 949 385 444 · Fax: +34 949 385 643

Review: January 2018

For possible changes due to continuous product improvements; Pinanson S.L. reserves the right to change the showed data in this document without notice. The data presented here correspond to the time it was compiled.