
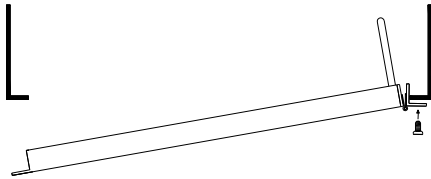


Tech Data

PATCH PANEL DOOR

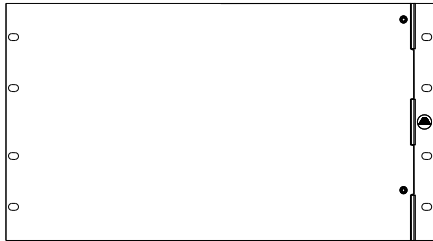

Description

The **Door Panel** is a rack mount panel which has joined to a fixed axis only a side (as a door) ⁽¹⁾ allowing the access to the rear connections.

⁽¹⁾ When the panel is closed is fixed with screw.

Applications

Installations where accessing to internal side of the rack: to wiring, change configurations, etc., is required

Tech Data

PATCH PANEL DOOR

Physical Characteristics

Panel

Panel Frame of extruded aluminium,
6063 Alloy, T5 Treatment.

Painted: powder electrostatic covering 100-150 μ . Standard colour: textured matte black (consult other colours).

Insulating Plate (depending on if it is required by the connector) between connector and panel through a Polyethylene plate of 10 mm and high density.

Label of Polypropylene 100 μ and white colour.

Tie Cable Bar of steel bar of F1 calibration and 8 mm.

Painted: powder electrostatic covering 100-150 μ . Standard colour: textured matte black (consult other colours).

Vinyl screen: customizable.



Web: www.pinanson.com
@: pinanson@pinanson.com

PINANSON S.L
Avda. Constitucion, 40. Mondejar (Guadalajara). SPAIN.
Telephone: +34 949 385 444 · Fax: +34 949 385 643

Review: March 2013

For possible changes due to continuous product improvements; Pinanson S.L. reserves the right to change the showed data in this document without notice. The data presented here correspond to the time it was compiled.