




Tech Data

PANEL SMPTE 304 MODULAR ADAPTOR

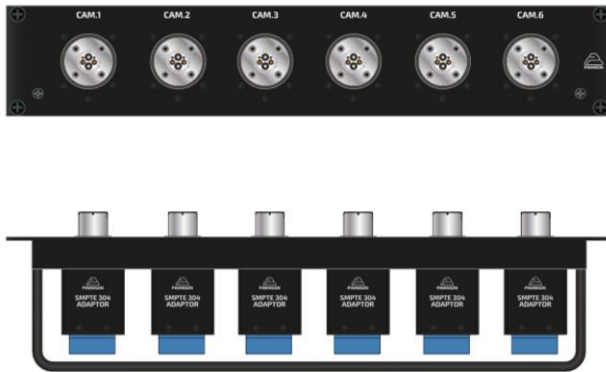

Description

- Patch Panel adaptor of Hybrid connectors SMPTE 304.
- **Front side:** SMPTE 304 Hybrid connector.
- **Rear side** (Each input): **1 EUROBLOCK** connector, **2 LC** connectors, **1 POWERCON** connector.
- 1 Row up to 5 Hybrid connectors (inputs) in 2 RU.
- TV Broadcast and Video devices signal.
- Thermoplastic Insulation plate in order to isolate connectors and chassis.

SMPTE STANDARDS

SMPTE 304-2009. Broadcast Cameras, Hybrid Electrical and Fiber-Optic Connector. It defines hybrid connectors, which contain a combination of electrical contacts and fiber-optic contacts for single-mode fiber



Tech Data


PANEL SMPTE 304 MODULAR ADAPTOR

Applications

Installations where is necessary to split up a SMPTE 304 hybrid signal into the different signals contained.

Physical Characteristics

Material	<ul style="list-style-type: none">• Panel made of extruded aluminium• Individual module made of extruded aluminium with an insulating thermoplastic plate• Tie cable bar• Finish: electrostatic paint and direct print	
Connectors	SMPTE 304	<i>LEMO FMW.3K.93C.TLMT96Z</i>
	Power	Terminal block 5 ends
	Optical Fibre	LC-LC Monomode
Dimensions	483 × 89 × 107 mm	

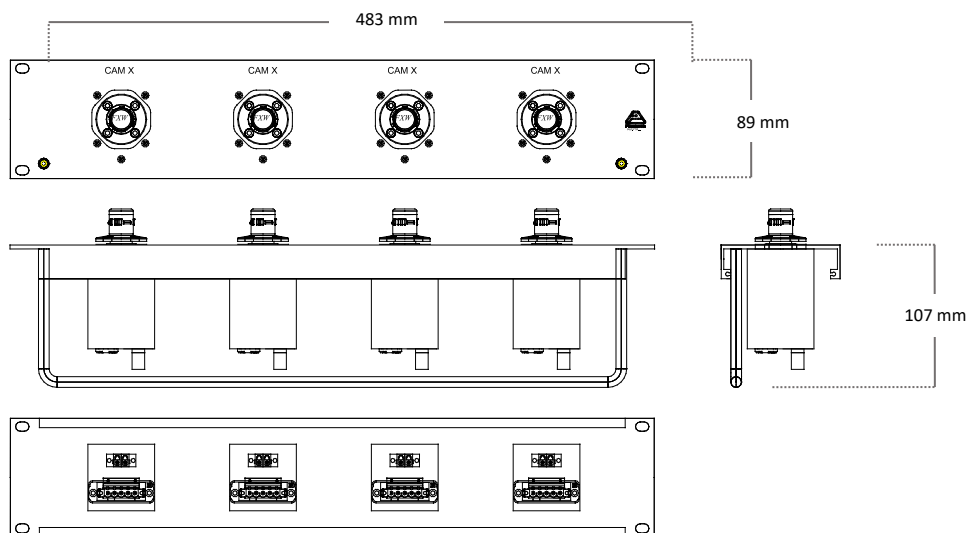



Connectivity Solutions for:
Scenic Arts · Broadcast · Professional Sound · A/V



3

Tech Data

PANEL
SMPTE 304
MODULAR ADAPTOR



www.pinanson.eu
pinanson@pinanson.eu

PINANSON S.L
Avda. Constitución, 40. Mondéjar (Guadalajara). SPAIN.
Telephone: +34 949 385 444 · Fax: +34 949 385 643

Review: July 2022

For possible changes due to continuous product improvements; Pinanson S.L. reserves the right to change the showed data in this document without notice. The data presented here correspond to the time it was compiled.

JULY 2022