


Tech Data

PRE-WIRED CABLE

AUDIO BANTAM-BANTAM

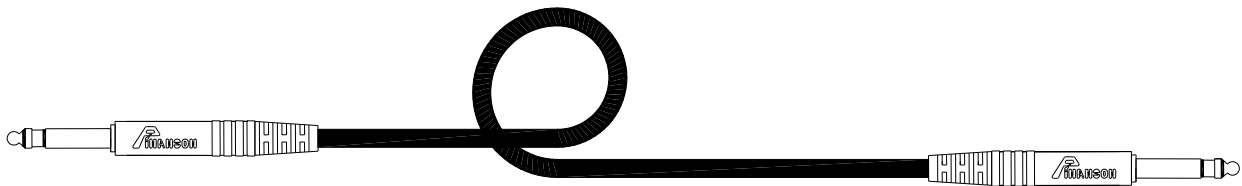

Description

Pre-wired cable with Pinanson **Bantam TT connector with 3 poles** for patching. Ideal cable for AES/EBU 110 Ω digital signal and analogue signals.

Physical Characteristics

TWISTED PAIR	Conductor	Insulation
	Material: Bare Cu (Copper)	Material: Foam PE
	Shielding	Outer Sheath
	Material: Aluminium foil Coverage: 100 % Drain wire: Tinned copper	Material: Flexible PVC
CONNECTOR	Housing	Contacts
	Injected thermoplastic	Copper alloy. Nickel plated.

Tech Data

PRE-WIRED CABLE

AUDIO
 BANTAM-BANTAM

Electrical Characteristics

Max. Resistance at 20° C	<87 Ω /Km
Insulation Resistance	>10.000 M Ω ×Km
Capacitance (conduc./conduc)	37 pF/m
Capacitance (conduc./shield)	57 pF/m
Impedance	110 Ω Ω
Inductance	<0.37 mH/Km
Propagation Speed	80%
Test Voltage	1500 V
Nominal Voltage	300 V
Temperature	-20°/70° C

Environment

RoHS (<i>Restriction of Hazardous Substances</i>)	Directive 2002/95/CE
---	----------------------

Applicable Regulations

Conductor Material	UNE-EN 60228
Insulating Material	UNE-EN 50290



Tech Data

PRE-WIRED CABLE

AUDIO
BANTAM-BANTAM



Web: www.pinanson.com
@: pinanson@pinanson.com

PINANSON S.L
Avda. Constitucion, 40. Mondejar (Guadalajara). SPAIN.
Telephone: +34 949 385 444 · Fax: +34 949 385 643

Review: July 2015

For possible changes due to continuous product improvements; Pinanson S.L. reserves the right to change the showed data in this document without notice. The data presented here correspond to the time it was compiled.