

AV BOXES

FLOOR

TB AT




- **Magnetic** closure: allows to open with any metal part.
- Double door: **general** and **auxiliary** door for cable exit that allows a complete closing of the box when it is not being used.
- **Full customization of the box** in terms of connectors, texts, logos and colour, allowing full integration with the aesthetics of the room.
- Max supported **weight** 1.292 kgf (kilogram-force)
- **Designed and manufactured by Pinanson S.L. in Spain**

Applications



- Room where is required to have access to video, audio, data and power connections in a box recessed in the floor.
- Facilities in which **keeping the boxes integrated with the decoration** of the room as well as high durability are important factors.

Special Characteristics

- Allows **perpendicular connection** to the floor.
- Main and **auxiliary door for cable** exit that allows to close the box when the cables are connected.
- **Magnet closure** that allows easy opening for technical staff (with any metal objet) and makes it difficult for visitors
- **Height adjustable** connection panel
- **Robust finish** that respects the **aesthetics** of the room.
- **Easy installation**, screwable and **easy wiring of the connectors**.
- **Custom manufacturing**: connectors, color, according to the room aesthetics, texts, logos.

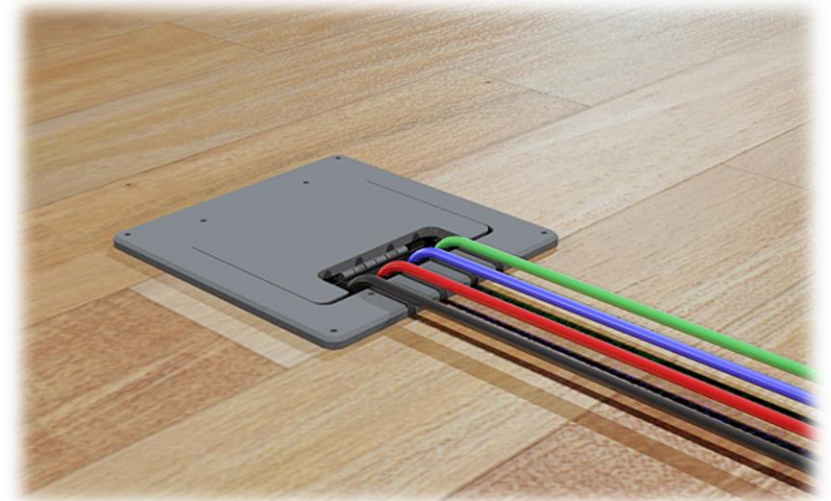

Models





2U183

Dimensiones

183X180X134
mm

Hueco

155x145 mm





2U233

Dimensiones

233X180X134

Hueco

205x145 mm

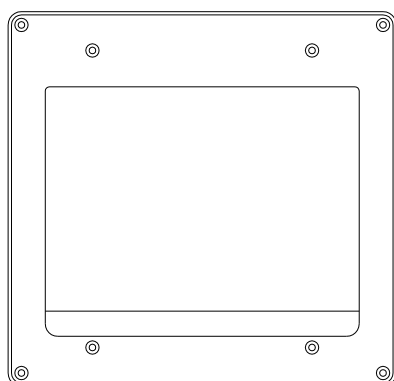



3U233

Dimensiones

233X255X134

Hueco

205x190 mm

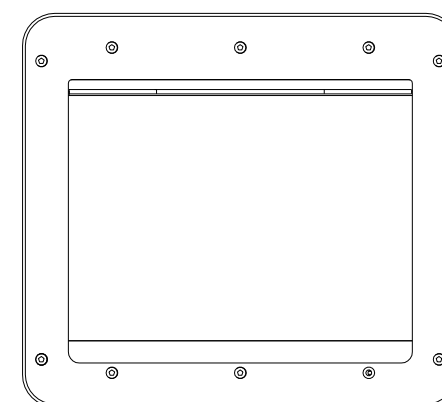

4U300

Dimensiones

300X270X178

Hueco

250x230 mm

Physical Characteristics

	MATERIAL						GROSOR		
	Extruded aluminium	Aluminium plate	6063 Alloy	Treatment T5	Stainless steel	Nickel-plated brass	1 mm	3 mm	6 mm
Panel Frame									
Front and rear panel									
Door and Flap									
Union laterals									
Door axis									
Axis support									
Cable exit hinges									
General finish	PAINT		COLOR		TEXTS				
	Powder electrostatic covering		Under request		Direct printing of logos, texts according client preferences				

Mechanical Characteristics

Maximum supported load (by compression test at 20 °C ± 3, 10 mm/min)	12.670 N		1.292 kgf (kilogram-force)	
Approx. weight	2U183	2U233	3U233	4U300
	1,5 Kg	2 Kg	2.4 Kg	3 Kg



Web: www.pinanson.eu
@: pinanson@pinanson.eu

PINANSON S.L
Avda. Constitución, 40. Mondéjar (Guadalajara). ESPAÑA.
Teléfono: +34 949 385 444 · Fax: +34 949 385 643

Revisión: May 2020

For possible changes due to continuous product improvements; Pinanson S.L. reserves the right to change the showed data in this document without notice. The data presented here correspond to the time it was compiled.