


# AV BOXES

## FLOOR

## CUBOID INS 30°

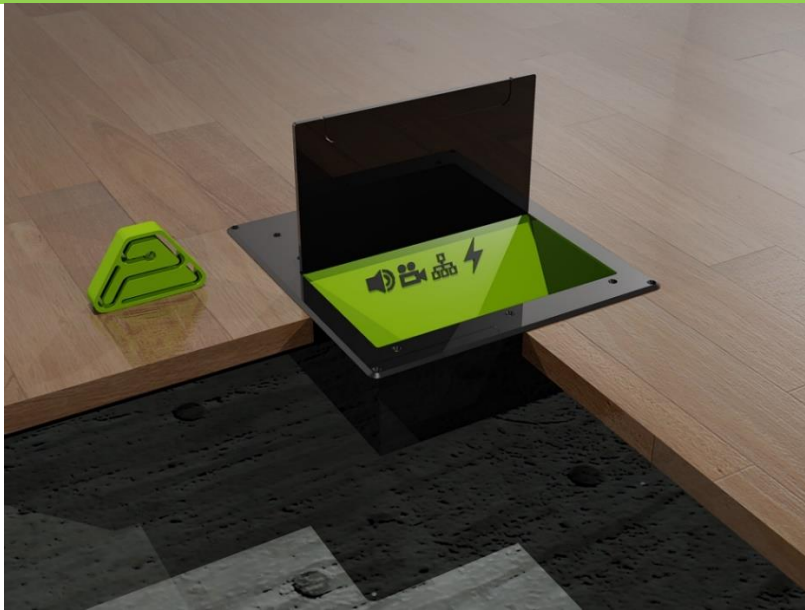

- **Magnetic closure:** allows to open with any metal part.
- Double door: **general** and **auxiliary** door for cable exit that allows a complete closing of the box when it is not being used.
- Panel with a **30° inclination** for a better accessibility.
- **Full customization of the box** in terms of connectors, texts, logos and colour, allowing full integration with the aesthetics of the room.
- Max supported weight 554 Kgf (kilogram-force)
- **Designed and manufactured by Pinanson S.L. in Spain**

## Applications

- Rooms **with space problems** to install a connection box.
- Room **where is required to have access to video, audio, data and power connections in a box recessed in the floor and with a 30° panel.**
- Facilities in which **keeping the boxes integrated with the decoration** of the room as well as high durability are important factors.



## Special Characteristics

- Connection on a panel with a **30° angle inclination** allowing an easier accessibility and handier operation
- Main and **auxiliary door for cable** exit that allows to close the box when the cables are connected.
- **Magnet closure** that allows easy opening for technical staff (with any metal objet) and makes it difficult for visitors
- **Robust finish** that respects the **aesthetics** of the room.
- **Easy installation**, screwable and **easy wiring of the connectors.**
- **Custom manufacturing:** connectors, color, according to the room aesthetics, texts, logos.



Panel inclinado 30°

## Models

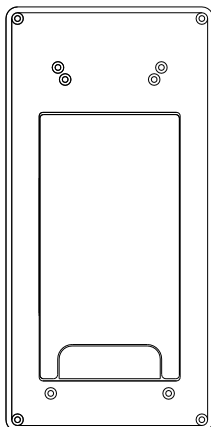



CUB IN 2UMM 30°

Dimensions

144 x 293 x 92 mm

Gap

115 x 255 mm

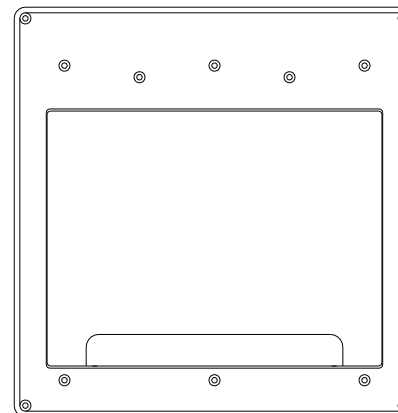

CUB IN 2UM 30°

Dimensions

287 x 293 x 92 mm

Gap

255 x 255 mm

## Physical Characteristics

	MATERIAL						GROSOR		
	Extruded aluminium	Aluminium plate	6063 Alloy	Treatment T5	Stainless steel	Nickel-plated brass	1 mm	3 mm	6 mm
Panel Frame									
Frontal and rear panel									
Door and Flap									
Union laterals									
Door axis									
Axis support									
Cable exit hinges									
General finish	PAINT		COLOR		TEXTS				
	Powder electrostatic covering		Under request		Direct printing of logos, texts according client preferences				

## Mechanical Characteristics

Maximum supported load (by compression test at 20 °C ± 3, 10 mm/min)	5.420 N	554 kgf (kilogram-force)
Approx. weight	2UMM	2UM
	2.3 Kg	3.4 Kg



Web: [www.pinanson.eu](http://www.pinanson.eu)  
@: [pinanson@pinanson.eu](mailto:pinanson@pinanson.eu)

PINANSON S.L  
Avda. Constitución, 40. Mondéjar (Guadalajara). ESPAÑA.  
Teléfono: +34 949 385 444 · Fax: +34 949 385 643

**Review: November 2020**

For possible changes due to continuous product improvements; Pinanson S.L. reserves the right to change the showed data in this document without notice. The data presented here correspond to the time it was compiled.